


CEILING SINGLE SPLIT TYPE

R410a On/Off
From 18000 Btu/h to
60000 Btu/h

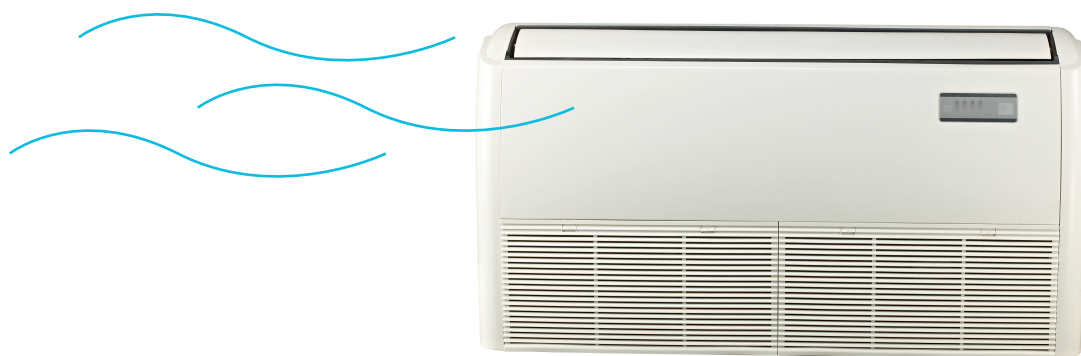

TECHNICAL DATA

Feature	Hydrophilic Fins Evaporator	Auto Defrosting	Auto Restart Function	Auto Diagnosis System	Fashion Design	Quiet Design
	LED Display	On/Off Timer	Slim Design	Independent Dehumidification	Sleep Mode	Wireless Remote Control / Wired Controller (Optional)

		INDOOR	KX-183AA	KX-243AA	KX-303AA	KX-403AA	KX-503AA	KX-603AA
		OUTDOOR	KC-181AA	KC-241AA	KC-301AA	KC-401AF	KC-501AF	KC-601AF
Capacity	Power Supply	V/Ph/Hz	220~240-1-50	220~240-1-50	220~240-1-50	380~415-3-50	380~420-3-50	380~415-3-50
	Cooling Capacity	Btu/Hr	18000	24000	32000	36000	48000	60000
	Power Input	W	2020	2600	3400	4000	5150	6300
	Current input	A	9.5	12.5	15.8	8.2	8.7	10.3
	EER	w/w	2.61	2.71	2.76	2.64	2.73	2.79
	Refrigerant Type		R410A	R410A	R410A	R410A	R410A	R410A
	Compressor Type		ROTARY	ROTARY	ROTARY	SCROLL	SCROLL	SCROLL
Indoor	Fan Motor Input	W	125/105/85	125/105/85	148/131/122	148/131/122	120/110/105	120/110/105
	Indoor Air Flow (Hi/Med/Lo)	m³/h	1300/1050/900	1194/999/863	1767/1493 /1272	1800/1500/1300	2300/1900/1700	2300/1900/1700
	Indoor Noise Level dB	dB(A)	52.4/48/43.7	52/47/44	53.2/49.4/45.8	54/50/46	57/53/50	58/55/52
	Net Dimension (W×D×H)	mm	1068x675x235	1068x675x235	1285x675x235	1285x675x235	1650x675x235	1650x675x235
	Packing Dimension (W×D×H)	mm	1145x755x313	1145x755x313	1360x755x313	1360x755x313	1725x755x313	1725x755x313
	Net/Gross Weight	Kg	24.6/29.5	31.4/44	28.7/34.4	29.1/34.6	39/45	41/48
Outdoor	Fan Motor Input	W	91.8/79.2	144	133/125	293.3/261	162	162
	Outdoor Noise Level dB	dB(A)	62	61	61.1	62.5	62.4	65.1
	Dimension (W×D×H)	mm	770x300x555	845x363x702	946x410x810	946x410x810	900x350x1170	900x350x1170
	Packing Dimension (W×D×H)	mm	900x348x615	965x395x755	1090x500x875	1090x500x875	1032x443x1307	1032x443x1307
	Net/Gross weight	Kg	33.7/36.2	49.1/52.3	62.8/68.4	73.6/78.2	91.3/102.9	92.3/104
	Refrigerant piping Size : Liquid	mm (Inch)	Φ6.35/1/4"	Φ9.52/3/8"	Φ9.52/3/8"	Φ9.52/3/8"	Φ9.52/3/8"	Φ9.52/3/8"
	Refrigerant piping Size : Gas	mm (Inch)	Φ12.7/1/2"	Φ15.9/5/8"	Φ15.9/5/8"	Φ15.9/5/8"	Φ15.9/5/8"	Φ19/3/4"